Manual

40W RGB+CCT Dimming Driver (2.4GHz)
Model No.: PL05

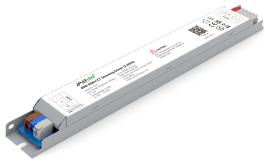

Features

- This product is made by 2.4G wireless transmitting technology with low consumption and strong ability to resist signal loss.
- Support 2.4G remote, 16 millions color, color temperature, brightness, saturation dimmable.
- Have DND mode, usually used in power failure area and save power.
- Compatible with "Tuya Smart" APP (need to purchase wifi box separately), more convenient for smart control.

Parameters

Model No.: PL05
Input Voltage: AC200-240V 50/60Hz
PF: >0.9
Dimming Range: 0-100%
Ta: 50°C Tc: 85°C

Output Voltage: DC30-40V
Output Power (Max): 40W
Constant Current Output: CW, WW: 900mA R,G,B: 200mA
2.4G RF Control Distance: 30m

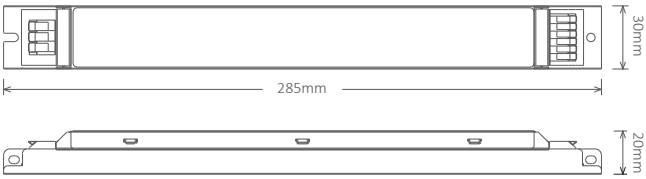

Connection Diagram

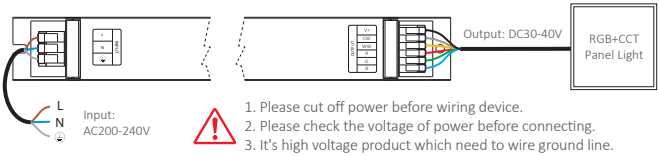

1. Please cut off power before wiring device.
2. Please check the voltage of power before connecting.
3. It's high voltage product which need to wire ground line.

Linking code



1. Power off

2. Wait for 10 seconds



3. Power on



4. Short press " I " 3 times within 3 seconds. Linking code is done if the lights flashes 3 times slowly.

Don't use "Master ON" to link code. You only can link lights into one zone on one remote.

Cleaning Code



1. Power off

2. Wait for 10 seconds



3. Power on



4. Short press " I " 5 times within 3 seconds. Cleaning code is done if the lights flashes 6 times quickly.

Dynamic Mode List

Attention: Brightness, saturation and speed are dimmable

No.	Dynamic mode
1	Automatical color changing
2	RGB gradual changing
3	Color changing randomly
4	Seven color jumping
5	Color jumping randomly
6	Volcano red
7	Forest green
8	Ocean blue
9	Three color jumping and gradual changing

Mini Brightness

1. Long press " OFF " or " ○ " in group zone 6 seconds until light flashes one time.

2. Short press " OFF " or " ○ " in group zone to set up 10 kinds of brightness level (1%, 5%, 10%, 15%, 20%, 25%, 30%, 35%, 40%, 50%).

Short press any button except "OFF" to confirm or step out setting, the master "OFF" can set up all features.

ON/OFF Time

The light status changes gradually (factory default time is 0.5s).

1.5s: Short press " I " 1 times and short press " ○ " 5 times within 3 seconds, the setting is done once light flashes 2 times slowly.

0.5s: Short press " I " 1 times and short press " ○ " 5 times within 3 seconds, the setting is done once light flashes 2 times quickly.

Attention

1. Don't disassemble it if you are not expert.
2. Don't use it in metallic or magnetic area.

Made in China

For more information scan QR code