


Manual

40W 0/1-10V Dimming Driver (2.4GHz)
Model No.: PL01



Features

- This product is made by 2.4G wireless transmitting technology with low consumption and strong ability to resist signal loss.
- Support 2.4G remote, 0-10V, 1-10V Dimming.
- Have DND mode, usually used in power failure area and save power.
- Compatible with "Tuya Smart" APP (need to purchase wifi box separately), more convenient for smart control.

Parameters

Model No.: PL01

Input Voltage: AC200-240V 50/60Hz

PF: >0.9

Dimming Range: 0-100%


Ta: 50°C Tc: 85°C

Output Voltage: DC30-40V

Output Power (Max): 40W


Constant Current Output: 900mA

2.4G RF Control Distance: 30m

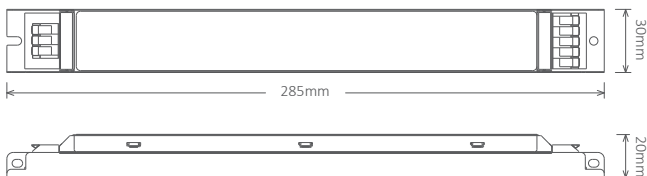


Connection Diagram

0-10V Details

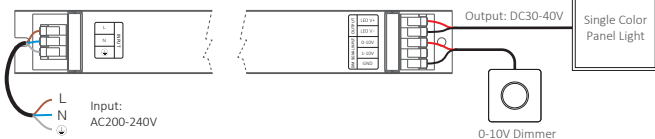


1-10V Details

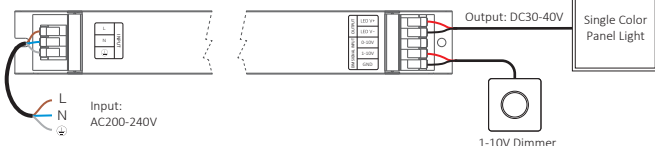

1. Please cut off power before wiring device.
2. Please check the voltage of power before connecting.
3. It's high voltage product which need to wire ground line.

Linking code




1. Power off




>10s

2. Wait for 10 seconds



3. Power on




4. Short press "I" 3 times within 3 seconds. Linking code is done if the lights flashes 3 times slowly.



Don't use "Master ON" to link code. You only can link lights into one zone on one remote.

Cleaning Code




1. Power off




>10s

2. Wait for 10 seconds



3. Power on



4. Short press "I" 5 times within 3 seconds. Cleaning code is done if the lights flashes 6 times quickly.

Mini Brightness

1. Long press "OFF" or "O" in group zone 6 seconds until light flashes one time.
2. Short press "OFF" or "O" in group zone to set up 10 kinds of brightness level (1%, 5%, 10%, 15%, 20%, 25%, 30%, 35%, 40%, 50%).



Short press any button except "OFF" to confirm or step out setting, the master "OFF" can set up all features.

ON/OFF Time

The light status changes gradually (factory default time is 0.5s).

- 1.5s:** Short press "I" 1 times and short press "O" 5 times within 3 seconds, the setting is done once light flashes 2 times slowly.
- 0.5s:** Short press "I" 1 times and short press "O" 5 times within 3 seconds, the setting is done once light flashes 2 times quickly.

Attention

1. Don't disassemble it if you are not expert.
2. Don't use it in metallic or magnetic area.



For more information
scan QR code



Made in China